


Apt-IC10 Specification Sheet.

Image



Frequency Response

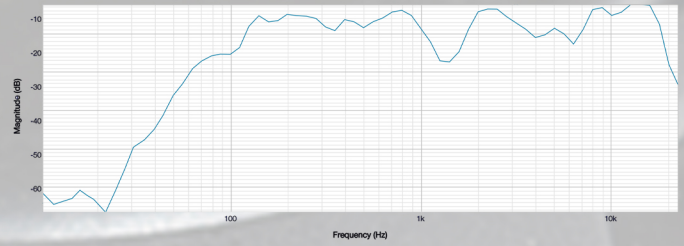


Specification:

Rated Power (AES)	300w
Rated impedance:	8Ω
SPL (1w1m)	94dB
SPL max:	116dB
Frequency response:	65Hz - 19KHz
Component:	10" Kevlar Paper 2.5" VC & 1" Silk Dome Tweeter (Dual Ferrite Motor)
IP rating:	IP20
Enclosure:	12mm Birch ply
Finish:	Black, White or *Custom colour
Flying points:	10x M10, 4 x M6 Back and Side (power drive 60) & 35mm Tophat with M20 Threaded Polemount
Connector:	2x Neutrik Speakon or 1x Phoenix
Weight:	11Kg

Dimensions

Dimensions (HWD): 370,220,245mm

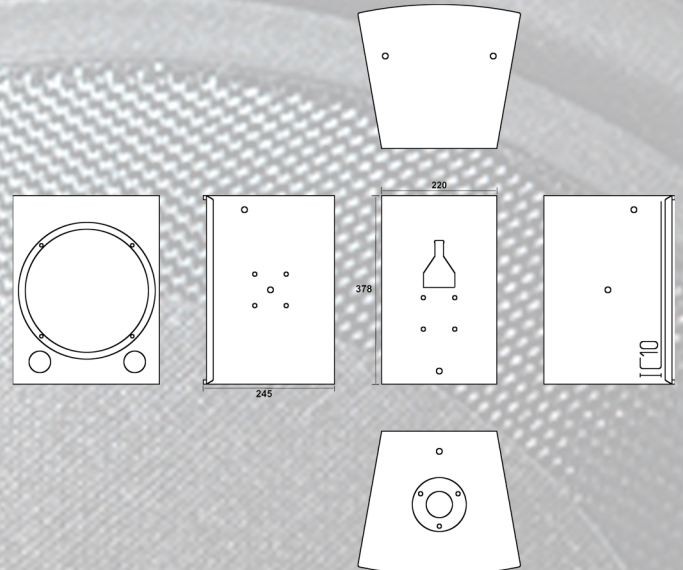

Recommended Settings & Accessory

Crossover settings:	70Hz 24dB LR
With Sub:	120Hz 24dB LR
Amplifier:	600w RMS

* Custom paint colours may incur extra cost and increase build time.
 ** Binding Post, 4 Pole euro block connector available may increase build time.
 Feet are not supplied on all cabins that have locations on them
 Specification can be changed by APT-GB with out prior notice.
 Apt-GB is trading as part of the GGPM LTD Group.