


# Apt-IC5 Specification Sheet.

## Image



## Frequency Response

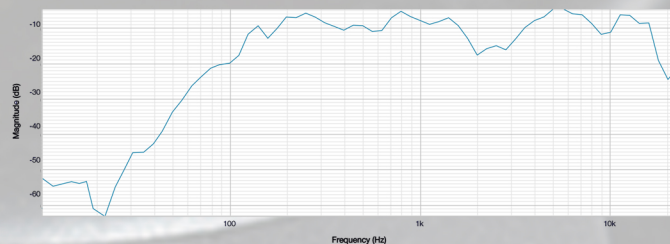


## Specification:

|                     |   |
|---------------------|---|
| Rated Power (AES)   | 150w  |
| Rated impedance:    | 8Ω  |
| SPL (1w1m)          | 89dB  |
| SPL max:            | 116dB   |
| Frequency response: | 80Hz - 20kHz  |
| Component:          | 5" Kevlar Paper 1" VC(Ferrite) & 1" Silk Dome Tweeter (Neo) |
| IP rating:          | IP20  |
| Enclosure:          | 9mm Birch ply   |
| Finish:             | Black, White or *Custom colour                              |
| Flying points:      | 4 x M6 Back and Side (Powerdrive 60)                        |
| Connector:          | 2 x Neutrik Speakon   |
| Weight:             | 5Kg   |

## Dimensions

**Dimensions (HWD):** 206, 146, 112mm

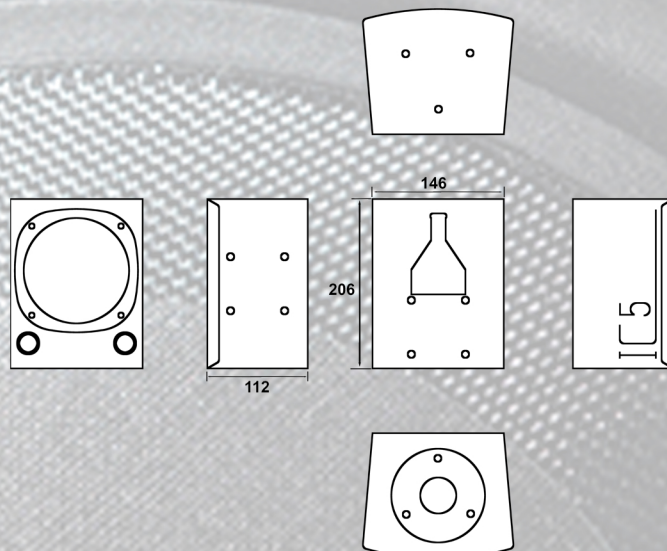

## Recommended Settings & Accessory

|                     |               |
|---------------------|---------------|
| Crossover settings: | 90Hz LR 24dB  |
| With Sub            | 125Hz 24dB LR |
| Amplifier:          | 300w RMS      |

\* Custom paint colours may incur extra cost and increase build time.  
 \*\* Binding Post, 4 Pole euro block connector available may increase build time.  
 Feet are not supplied on all cabins that have locations on them  
 Specification can be changed by APT-GB with out prior notice.  
 Apt-GB is trading as part of the GGPM LTD Group.