


# Apt-IC8 Specification Sheet.

## Image



## Frequency Response

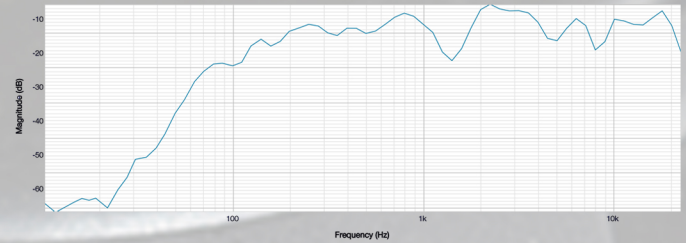


## Specification:

Rated Power (AES)	200w
Rated impedance:	8Ω
SPL (1w1m)	94dB
SPL max:	118dB
Frequency response:	75Hz - 19KHz
Component:	8" Kevlar Paper 1.5" VC & 1.4" Polyimide Tweeter (Dual Ferrite Motor)
IP rating:	IP20
Enclosure:	12mm Birch ply
Finish:	Black, White or *Custom colour
Flying points:	10x M10, 4 x M6 Back and Side (power drive 60) & 35mm Tophat with M20 Threaded Polemount
Connector:	2x Neutrik Speakon or 1x Phoenix
Weight:	9Kg

## Dimensions

Dimensions (HWD): 286,180,216mm

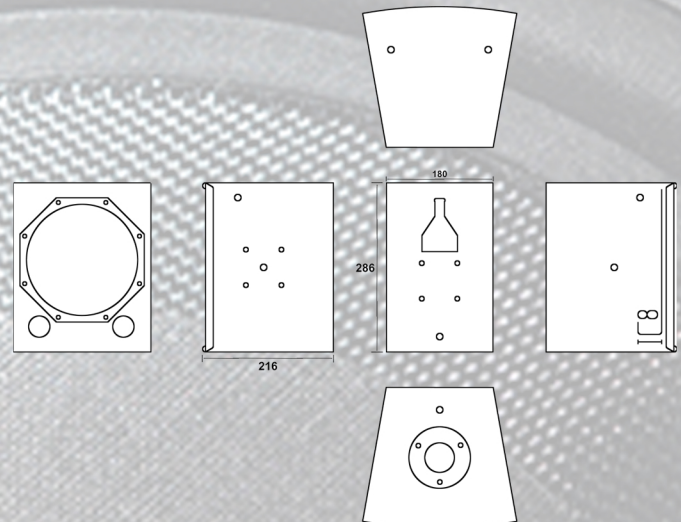

## Recommended Settings & Accessory

Crossover settings:	90Hz 24dB LR
With Sub:	120Hz 24dB LR
Amplifier:	400w RMS

\* Custom paint colours may incur extra cost and increase build time.  
 \*\* Binding Post, 4 Pole euro block connector available may increase build time.  
 Feet are not supplied on all cabins that have locations on them  
 Specification can be changed by APT-GB with out prior notice.  
 Apt-GB is trading as part of the GGPM LTD Group.