


# Apt-SMA8 Specification Sheet.

## Image



## Frequency Response

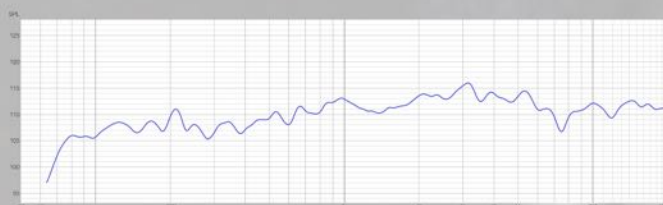


## Specification:

<b>Rated Power (AES)</b>	200w
<b>Rated Impedance:</b>	8Ω
<b>SPL (1w1m)</b>	94dB
<b>SPL max:</b>	118dB
<b>Frequency response:</b>	70Hz - 20KHz
<b>Component:</b>	8" (2" coil) Ferrite coaxial
	1.4" Polyamide compression HF
<b>Dispersion angle:</b>	100 degree
<b>IP rating:</b>	IP20
<b>Wedge angle:</b>	30degree
<b>Enclosure:</b>	12mm Birch ply
<b>Finish:</b>	Black, White or *Custom colour
<b>Flying points:</b>	M20 Threaded Pole Mount
<b>Feet locations:</b>	4 x Rubber Feet
<b>Connector:</b>	2x Neutrik Speakons or **binding post
<b>Weight:</b>	10kg

## Dimensions

**Dimensions (HWD):** 360, 510, 390mm

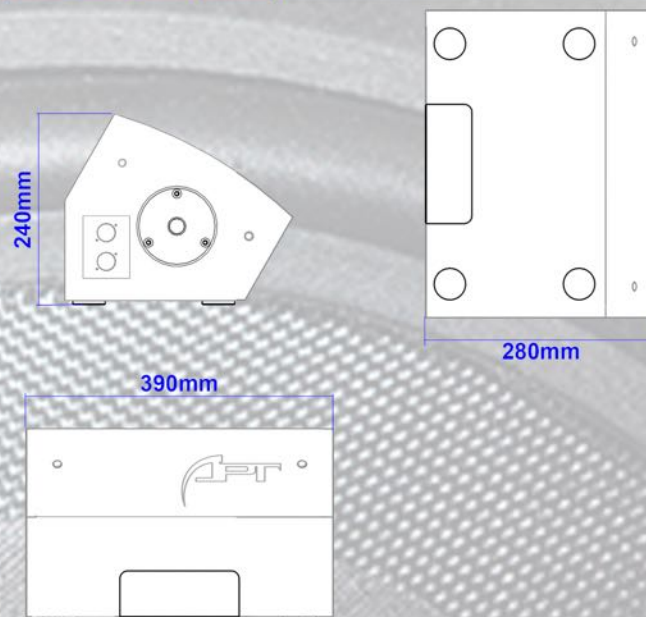

## Recommended Settings & Accessory

<b>Crossover settings:</b>	100Hz LR 24dB (With Sub)
	65Hz LR 48dB (Full Range)
<b>Correction EQ:</b>	3KHz, -2dB, 3.Q
<b>Amplifier:</b>	600w RMS
<b>Recommend Sub:</b>	APT-SC121
	APT-SC101
	APT-SC208
<b>Poles:</b>	Penn Elcom M20 threaded pole

\* Custom paint colours may incur extra cost and increase build time.  
 \*\* Binding Post, 4 Pole euro block connector available may increase build time.  
 Feet are not supplied on all cabins that have locations on them  
 Specification can be changed by APT-GB with out prior notice.  
 Apt-GB is trading as part of the GGPM LTD Group.