Apt-SC210 Specification Sheet.

Image

## Frequency Response
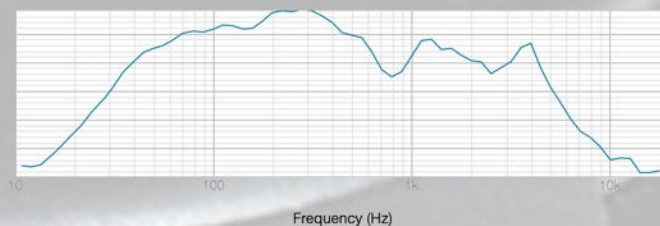
Frequency (Hz)

Specification:

Rated Power (AES)	600w
Rated impedance:	4Ω
SPL (1w1m)	97dB
SPL max:	125dB
Frequency response:	40Hz - 400Hz
Component:	2 x 10" (2.6" coil) Ferrite Cast Woofer
IP rating:	IP20
Enclosure:	15mm Birch ply
Finish:	Black, White or *Custom colour
Flying points:	M20 Pole Mount
Optional:	M10 Flying Points
Connector:	2 x Neutrik Speakon
Weight:	25 Kg

Dimensions

Dimensions (HWD):	300, 680, 460mm
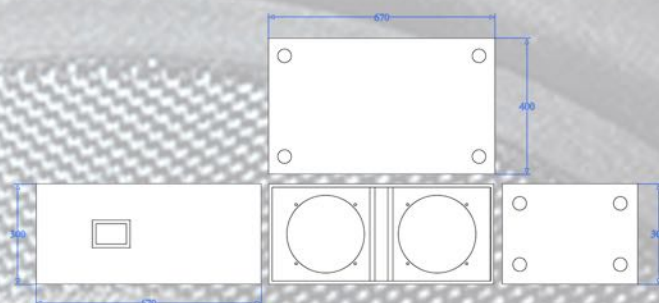
Recommended Settings & Accessory

Crossover settings:	35Hz LR 24dB
	125Hz 24dB LR
With Top Pack	150Hz 12dB LR
Correction EQ:	+3dB 63Hz 15Q
Amplifier:	1200w RMS

* Custom paint colours may incur extra cost and increase build time.
** Binding Post, 4 Pole euro block connector available may increase build time.
Feet are not supplied on all cabins that have locations on them
Specification can be changed by APT-GB with out prior notice.
Apt-GB is trading as part of the GGPM LTD Group.

Tel: +44 (0) 1579 212210
Email: info@apt-gb.com
Website: www.apt-gb.com